# Task luminaire PARA.MI
# MFTL 102 R

113150000-00643780

Waldmann
LIGHT FOR BETTER RESULTS




CEE 7/XVI

BS 1363

NEMA 1-15P

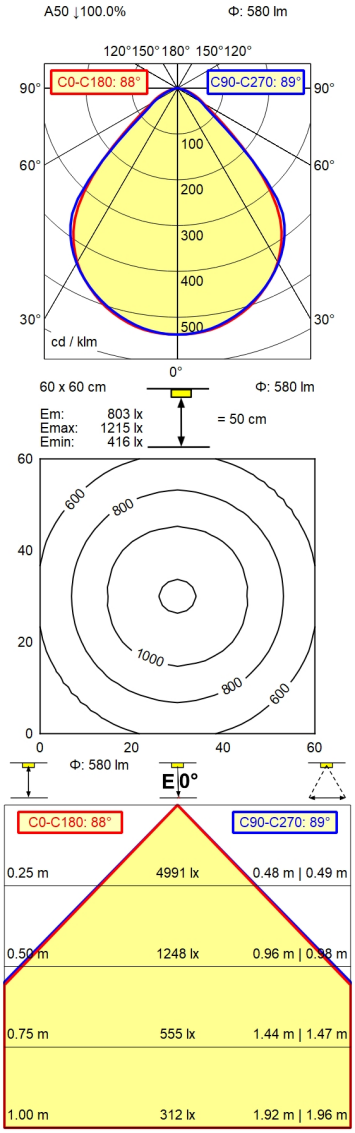


| | |
|---|---|
| **Connected load** | 100 - 240 V; AC; 50 Hz; 60 Hz |
| **Work equipment** | Electronic plug-in transformer |
| **Secondary tension** | 24 V |
| **Power consumption** | approx. 7 W |
| **Sec. power consumption** | approx. 6 W |
| **Luminous flux** | approx. 580 lm |
| **Luminous efficiency** [1] | approx. 96 lm/W |
| **Light type/-color** | Warm white |
| **Colour temperatur** | approx. 3.000 K |
| **Color rendering index** | CRI ≥ 90; R9 ≥ 50 |
| **Light distribution** | Direct; Symmetric; approx. 100 % |
| **Glare control** | Reflector |
| **Light source** | LED |
| **Chromaticity tolerance LED** | < 3 SDCM |
| **Energy efficiency class** | D |
| **At-risk group** | RG0/1 |
| **System of protection/Class** | IP 20; II with plug-in power supply, III without plug-in power supply |
| **Technology** | Continuously dimmable |
| **Operation** | Push button |
| **Housing** | Aluminium; Painted; Silver |
| **Light source cover** | Clear; Plastic |
| **Arm** | Silver metallic |
| **Mains lead** | approx. 3 m; Mains plug; CEE 7/XVI; BS 1363; NEMA 1-15P |
| **Fastening** | Adaptor (accessory); Spigot Ø16mm; Table base (accessory); Table clamp (accessory) |
| **Weight without/incl. packaging** | 1; approx. 1,5 kg |
| **Packaging dimensions** | 710 mm; approx. 300 mm; 105 mm |
| **EAN** | 4013330064938 |
| **Special features** | Automatic switchoff adjustable; Behaviour at net recovery adjustable; Push button in luminaire head |

[1] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

www.waldmann.com
© 01/11/2026 H.Waldmann GmbH & Co. KG

# Task luminaire PARA.MI
# MFTL 102 R

113150000-00643780

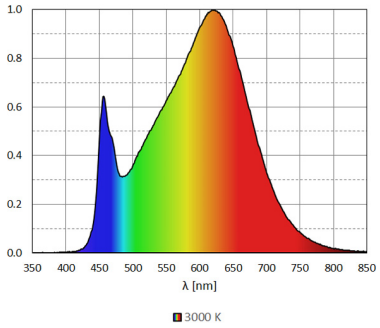


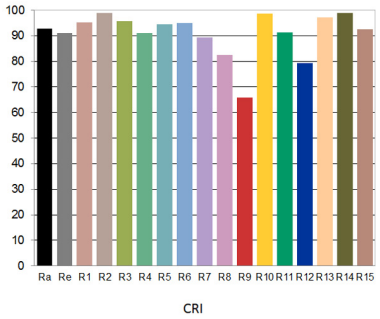


Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

www.waldmann.com
© 01/11/2026 H.Waldmann GmbH & Co. KG