


CE



RST 25i3 Einbau

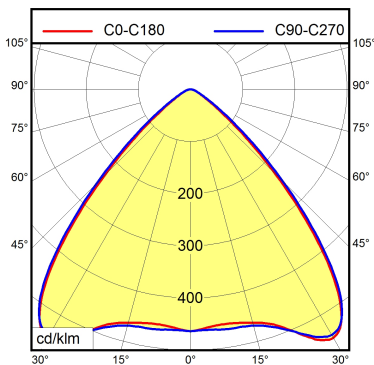

<b>light source</b>	LED
<b>work equipment</b>	electronic ballast
<b>connected load</b>	220-240V, 50/60Hz
<b>power consumption</b>	env. 206 W
<b>power factor</b>	env. 0,973
<b>lens</b>	W optics, wide beam
<b>luminous flux</b>	approx. 33.000 lm
<b>luminous efficiency</b>	approx. 160 lm/W
<b>light distribution</b>	direct, wide-angled beam
<b>direct ratio</b>	approx. 100 %
<b>beam angle</b>	88°
<b>colour temperature</b>	neutral white
<b>colour temperatur</b>	approx. 5.000 K
<b>color rendering index (CRI)</b>	>= 80
<b>chromaticity tolerance LED</b>	< 3 SDCM
<b>glare control</b>	Faceted optic
<b>luminance (L65)</b>	<= 6800 cd/m <sup>2</sup>
<b>unified glare rating (4H 8H)</b>	<= 25
<b>system of protection</b>	IP 65
<b>class of protection</b>	I
<b>technology</b>	switchable
<b>housing</b>	aluminium; 8; wa
<b>cover</b>	acrylic clear
<b>weight (net)</b>	env. 10,8 kg
<b>mains lead</b>	built-in plug; RST 25i3 Einbau
<b>fastening</b>	available separately
<b>accessory</b>	Junction box (RST 2013)
<b>minimum ambient temperature</b>	-30 °C
<b>maximum ambient temperature</b>	+50 °C
<b>decorative contrast side parts</b>	Jet black
<b>life expectancy LED</b>	3