


RST 25i3 Einbau

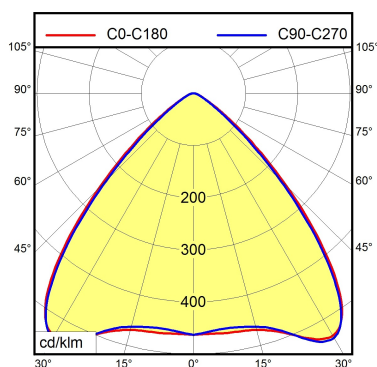

<b>Light source</b>	LED
<b>Work equipment</b>	Electronic ballast
<b>Connected load</b>	220 - 240 V; AC; 50 Hz; 60 Hz
<b>Power consumption</b>	approx. 90 W
<b>Power factor</b>	env. 0,950
<b>Luminous flux</b>	approx. 15.000 lm
<b>Luminous efficiency <sup>1)</sup></b>	approx. 166 lm/W
<b>Light type/-color</b>	Cold white
<b>Colour temperatur</b>	approx. 5.000 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Wide beam; Direct; Symmetric; approx. 100 %
<b>Beam angle</b>	88 °
<b>Chromaticity tolerance LED</b>	< 3 SDCM
<b>Glare control</b>	Optics
<b>Luminance (L65)</b>	≤ 4.700 cd/m <sup>2</sup>
<b>UGR class (4H 8H; EN 12464-1)</b>	≤ 22
<b>System of protection/Class</b>	IP 65; I
<b>Technology</b>	Switchable; DC control signal
<b>Operation</b>	External
<b>Housing</b>	Aluminium; Powder coatet; White aluminium
<b>Light source cover</b>	Acrylic (PMMA); Clear
<b>Mains lead</b>	Built-in plug; RST 25i3 Einbau
<b>Design</b>	mounted version
<b>Fastening</b>	Available separately
<b>Accessory</b>	Junction box (RST 2013)
<b>Ambient temperature min./max</b>	-30 °C; 50 °C
<b>Decorative contrast side parts</b>	Jet black
<b>Life expectancy LED</b>	L80B50 60.000h
<b>EAN</b>	4013330003791
<b>Weight without/incl. packaging</b>	8,2; approx. 11,2 kg
<b>Packaging dimensions</b>	approx. 642 mm; 525 mm; 250 mm

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g