
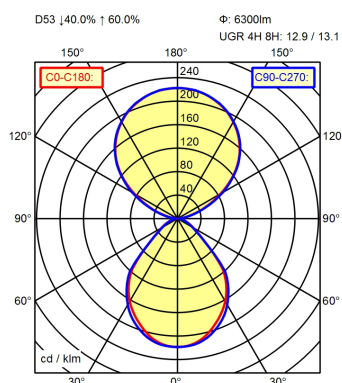
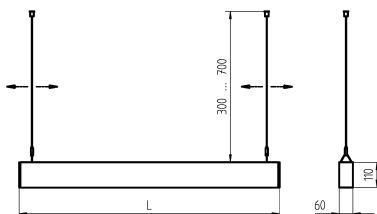




Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Light type/color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight (net)

Weight incl. packaging

Dimensions

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 46 W

ca. 0,15 W

env. 0,980

approx. 6.300 lm

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect

approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

1-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330021139

ca. 7,5 kg

ca. 9,8 kg

2.256 mm

L=2256mm

ca. 2.410; 190; 120

Flicker-free; DALI Load 1x; Suitable as emergency lighting; TouchDIM - dimming via standard switch