


# Free-standing luminaire YARA.single YAS 15000/840/R/SW/CEE/00/C

114268000-00808305


# Waldmann **W**

ENGINEERS OF LIGHT

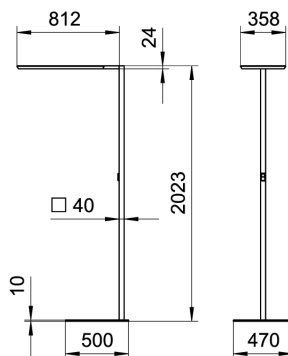

CEE 7/VII

D43 ↓ 13.0% ↑ 87.0%



**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Standby**

**Power factor**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Direct ratio**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**UGR class (4H 8H; EN 12464-1)**

**System of protection**

**Class of protection**

**Technology**

**Operation**

**Emergency lighting**

**Housing**

**Light source cover**

**Arm**

**Luminaire base**

**Mains lead**

**Fastening**

**Life expectancy LED**

**Energy efficiency class**

**EAN**

**Weight (net)**

**Weight incl. packaging**

**Dimensions**

**Special features**

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 107 W; 107 W

ca. 0,5 W

env. 0,966

approx. 15.000 lm

approx. 140 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect

approx. 13 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m<sup>2</sup>

≤ 16

IP 20

I

Presence and daylight sensor control (PIR); -

Wireless switch

none

Aluminium/plastic; Powder coatet; Black

Acrylic (PMMA); Structured; Satine

Steel tube; Powder-coated; Tubular section

upright; Black

C-form flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

L80B50 60.000h

D; D

4013330056926

ca. 18 kg

ca. 22,3 kg

2.024 mm

Asymmetric radiation; Flicker-free; App control; Direct and indirect lighting component with edge light and light guide technology for a homogeneous light exit; PIR movement and daylight sensor; Magnetic control panel, freely positionable

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear