



# Free-standing luminaire YARA.single YAS 8000/840/R/SW/CEE/00/C

114268000-00808311

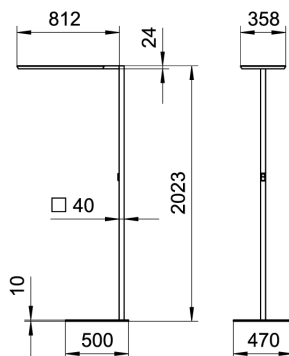

CEE 7/VII

D43 ↓ 13.0% ↑ 87.0%



<b>Light source</b>	LED
<b>Work equipment</b>	Electronic ballast DALI
<b>Connected load</b>	220 - 240 V; AC; 50 Hz; 60 Hz
<b>Power consumption</b>	ca. 56 W; 107 W
<b>Power factor</b>	env. 0,966
<b>Luminous flux</b>	approx. 8.000 lm
<b>Luminous efficiency <sup>1)</sup></b>	approx. 142 lm/W
<b>Light type/-color</b>	Cold white
<b>Colour temperatur</b>	approx. 4.000 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Direct/indirect; Steel tube; Powder-coated; Tubular section upright; Black approx. 13 %
<b>Direct ratio</b>	< 3 SDCM
<b>Chromaticity tolerance LED</b>	Prism aperture
<b>Glare control</b>	≤ 1.500 cd/m <sup>2</sup>
<b>Luminance (L65)</b>	≤ 16
<b>Unified glare rating (4H 8H) <sup>2)</sup></b>	IP 20
<b>System of protection</b>	I
<b>Class of protection</b>	Presence and daylight sensor control (PIR); -
<b>Technology</b>	Wireless switch
<b>Operation</b>	none
<b>Emergency lighting</b>	Aluminium/plastic; Powder coatet; Black
<b>Housing</b>	Acrylic (PMMA); Structured; Satine
<b>Light source cover</b>	C-form flat
<b>Luminaire base</b>	ca. 3 m; Mains plug; CEE 7/VII
<b>Mains lead</b>	Floor standing base
<b>Fastening</b>	L80B50 60.000h
<b>Life expectancy LED</b>	4013330057312
<b>EAN</b>	ca. 18 kg
<b>Weight (net)</b>	2.024 mm
<b>Dimensions</b>	Asymmetric radiation; Flicker-free; App control; Direct and indirect lighting component with edge light and light guide technology for a homogeneous light exit; PIR movement and daylight sensor; Magnetic control panel, freely positionable
<b>Special features</b>	

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear according to DIN EN 12464-1:2021

<sup>2)</sup>