
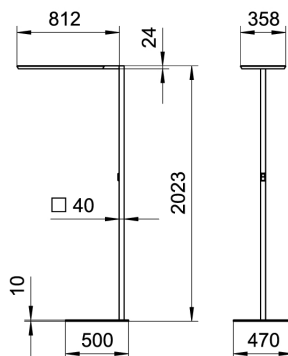



# Free-standing luminaire YARA.single YAS 15000/VTL/RX/SR/CEE/S0/C

114268000-00808359

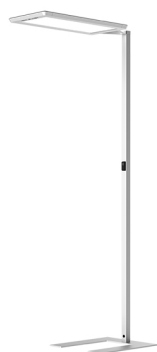

CEE 7/VII

D43 ↓ 13.0% ↑ 87.0%



<b>Light source</b>	LED
<b>Work equipment</b>	Electronic ballast DALI
<b>Connected load</b>	220 - 240 V; AC; 50 Hz; 60 Hz
<b>Power consumption</b>	ca. 107 W; 107 W
<b>Standby</b>	ca. 0,5 W
<b>Power factor</b>	env. 0,966
<b>Luminous flux</b>	approx. 15.000 lm
<b>Luminous efficiency <sup>1)</sup></b>	approx. 140 lm/W
<b>Light type/-color</b>	dynamic white; Warm white; Daylight
<b>Colour temperatur</b>	approx. 2.700 - 6.500 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Direct/indirect; approx. 13 %
<b>Chromaticity tolerance LED</b>	< 3 SDCM
<b>Glare control</b>	Prism aperture
<b>Luminance (L65)</b>	≤ 2.700 cd/m <sup>2</sup>
<b>UGR class (4H 8H; EN 12464-1)</b>	≤ 16
<b>System of protection/Class</b>	IP 20; I
<b>Technology</b>	Multiple daylight-dependent motion sensors
<b>Operation</b>	Wireless switch
<b>Housing</b>	Aluminium/plastic; Powder coatet; Silver metallic
<b>Light source cover</b>	Acrylic (PMMA); Structured; Satine
<b>Arm</b>	Steel tube; Powder-coated; Tubular section upright; Silver metallic
<b>Luminaire base</b>	C-form
<b>Mains lead</b>	ca. 3 m; Mains plug; CEE 7/VII
<b>Fastening</b>	Floor standing base
<b>Life expectancy LED</b>	L80B50 60.000h
<b>Energy efficiency class</b>	D; D
<b>EPREL number of lightsources</b>	1974823; 1974843; 1974875
<b>EAN</b>	4013330061234
<b>Weight without/incl. packaging</b>	ca. 18 kg; 22,3 kg
<b>Special features</b>	Asymmetric radiation; Flicker-free; App control; Optional LTX Cloud connection; Direct and indirect lighting component with edge light and light guide technology for a homogeneous light exit; LTX multisensor for workplace optimisation; TALK Bluetooth; Biodynamic light VTL; Magnetic control panel, freely positionable

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g