Free-standing luminaire YARA.single
YAS 15000/VTL/R/SR/CEE/00/C

114268000-00808703

Waldmann
LIGHT FOR BETTER RESULTS

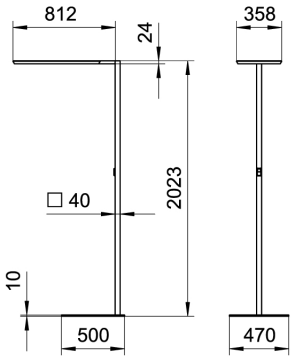

CEE 7/VII

D43 ↓13.0% ↑ 87.0%



Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Work equipment	Electronic ballast DALI
Power consumption	approx. 107 W; 107 W
Standby	approx. 0,5 W
Luminous flux	approx. 15.000 lm
Luminous efficiency [1]	approx. 140 lm/W
Light type/-color	dynamic white; Warm white; Daylight
Colour temperatur	approx. 2.700 - 6.500 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect; approx. 13 %
Glare control	Prism aperture
Light source	LED
Life expectancy LED	L80B50 60.000h
Chromaticity tolerance LED	< 3 SDCM
Energy efficiency class	D; D
At-risk group	RG0/1
Luminance (L65)	≤ 2.700 cd/m²
UGR class (4H 8H; EN 12464-1)	≤ 16
System of protection/Class	IP 20; I
Technology	Presence and daylight sensor control (PIR)
Operation	Wireless switch
Housing	Aluminium/plastic; Powder coatet; Silver metallic
Light source cover	Acrylic (PMMA); Structured; Satine
Arm	Steel tube; Powder-coated; Tubular section upright; Silver metallic
Luminaire base	C-shaped; Silver metallic
Mains lead	approx. 3 m; Mains plug; CEE 7/VII
Fastening	Floor standing base
Weight without/incl. packaging	18; approx. 22,3 kg
Packaging dimensions	0 mm; approx. 0 mm; 0 mm
EAN	4013330090579
Power factor	env. 0,966
Special features	Asymmetric radiation; Flicker-free; App control; Direct and indirect lighting component with edge light and light guide technology for a homogeneous light exit; PIR movement and daylight sensor; Biodynamic light VTL; Magnetic control panel, freely positionable

[1] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

© 12/10/2026 H.Waldmann GmbH & Co. KG