



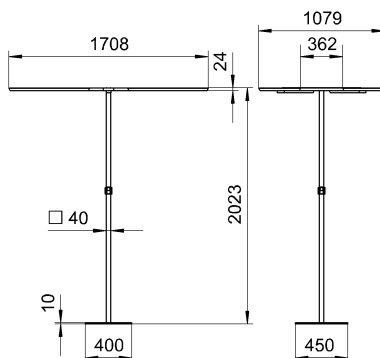

CEE 7/VII

D43 ↓ 13.0% ↑ 87.0%



Light source

Work equipment

Connected load

Power consumption

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection

Class of protection

Technology

Operation

Emergency lighting

Housing

Light source cover

Arm

Luminaire base

Mains lead

Fastening

Life expectancy LED

EAN

Weight (net)

Weight incl. packaging

Dimensions

Special features

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 427 W; 428 W

env. 0,966

approx. 60.000 lm

approx. 140 lm/W

dynamic white; Warm white; Cold white; Daylight

approx. 2.700 K; 6.500 K

CRI ≥ 80

Direct/indirect

approx. 13 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 20

I

Multiple daylight-dependent motion sensors; -

Wireless switch

none

Aluminium/plastic; Powder coatet; White

Acrylic (PMMA)

Steel tube; Powder-coated; Tubular section
upright; White
Rectangular flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

L80B50 60.000h

4013330147426

ca. 38 kg

ca. 42,3 kg

2.024 mm

Asymmetric radiation; Flicker-free; App control;
Optional LTX Cloud connection; Direct and indirect
lighting component with edge light and light
guide technology for a homogeneous light exit;
LTX multisensor for workplace optimisation; TALK
Bluetooth; Biodynamic light VTL; Magnetic control
panel, freely positionable

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g