


3 pin

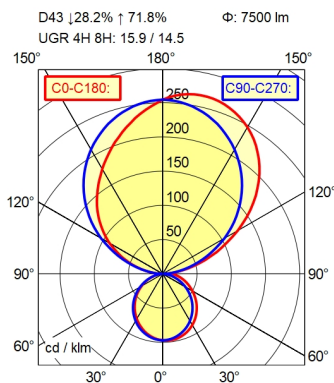

**Work equipment**

**Connected load**

**Power consumption**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Chromaticity tolerance LED**

**Glare control**

**UGR class (4H 8H; EN 12464-1)**

**System of protection/Class**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Mains lead**

**Design**

**Fastening**

**Ambient temperature min./max**

**Decorative contrast side parts**

**Life expectancy LED**

**EAN**

**Weight without/incl. packaging**

**Packaging dimensions**

**Special features**

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

approx. 74 W

approx. 7.690 lm

approx. 103 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 28 %

< 3 SDCM

Diffusor

≤ 16

IP 20; I

Two-stage switchable

External

Sectional aluminium; Anodised; Aluminium

coloured anodised

Acrylic (PMMA); White opal

Connection box; 3 pin

mounted version

Mounting rail

0 °C; 30 °C

White

L70B50 60.000h

4013330145859

4; approx. 5,8 kg

approx. 1.290 mm; 385 mm; 140 mm

General light, indirect, 3000K, Ra≥80; Night light, indirect, 2700K, Ra≥80; Reading light, direct, 3,00K, Ra≥80; DIN EN 60598-2-25

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear