





# Suspended luminaire VIVAA.pendant VIP 6000/940/D

114483000-00812685



5 pin

C53 | 44.6% ↑ 55.4%      Φ: 6400 lm  
UGR 4H 8H: 14.3 / 14.3

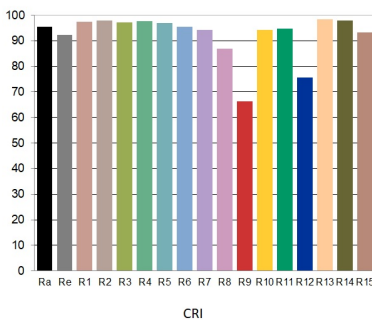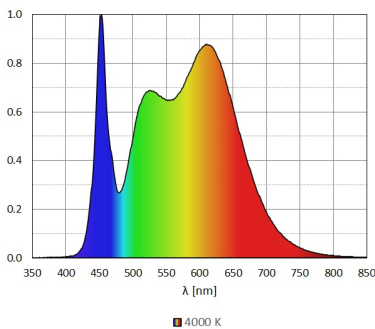

**Work equipment**

**Connected load**

**Power consumption**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Glare control**

**Luminance (L65)**

**UGR class (4H 8H; EN 12464-1)**

**System of protection/Class**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Mains lead**

**Fastening**

**Maximum ambient temperature**

**Energy efficiency class**

**EAN**

**Weight without/incl. packaging**

**Packaging dimensions**

**Special features**

Power supply unit

220 - 240 V; 50 Hz; 60 Hz

approx. 53 W

approx. 6.400 lm

approx. 120 lm/W

Cold white

approx. 4.000 K

CRI ≥ 90; R9 ≥ 50

Direct/indirect; approx. 45 %

Prism aperture

≤ 2.800 cd/m<sup>2</sup>

≤ 16

I

Two-stage switchable; Continuously dimmable;

DALI

External

Aluminium; Painted; White

Acrylic (PMMA); Satine

approx. 2 m; Connector; 5 pin; Single Luminaire

Ceiling mounted

25 °C

C; E

4013330151850

5,5; approx. 6,6 kg

approx. 585 mm; 475 mm; 175 mm

Power cable white; DIN EN 60598-2-25; Separated, direct and indirect light individually adjustable; DALI Load 2x; Suitable as emergency lighting

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear