


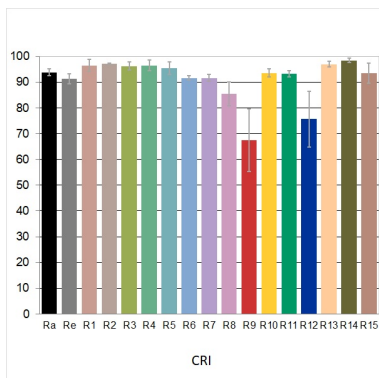


Suspended luminaire VIVAA.pendant VIP 7000/VTL/D

114485000-00812835

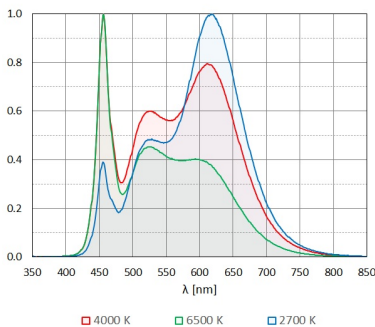

5 pin

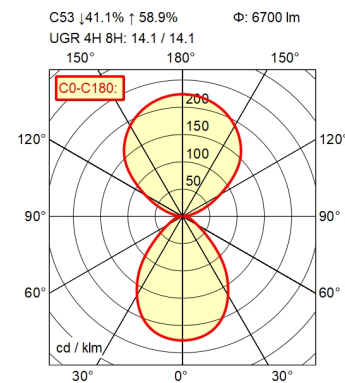

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Fastening

Maximum ambient temperature

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

approx. 61 W

approx. 6.700 lm

approx. 109 lm/W

adjustable white

approx. 2.700 - 6.500 K

CRI ≥ 90; R9 ≥ 50

Direct/indirect; approx. 40 %

Prism aperture

≤ 2.800 cd/m²

≤ 16

I

Two-stage switchable; Continuously dimmable;

DALI

External

Aluminium; Painted; White

Acrylic (PMMA); Satine

approx. 2 m; Connector; 5 pin; Single Luminaire

Ceiling mounted

25 °C

C; E

4013330151911

5,5; approx. 6,6 kg

approx. 585 mm; 475 mm; 175 mm

DIN EN 60598-2-25; Separated, direct and indirect

light individually adjustable; External control

device required for DALI Device Type 6;

Biodynamic light VTL; Specified values at approx.

4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g