


Wall-mounted luminaire ZERA.bed ZEW 11000/830

114487000-00813008


Waldmann **W**

ENGINEERS OF LIGHT

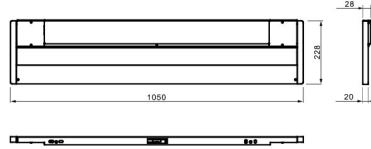

5 pin

C43 ↓46.9% ↑53.1% Φ: 9800 lm



Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Maximum ambient temperature

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 122 W

approx. 10.890 lm

approx. 89 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect

< 3 SDCM

Diffusor

IP 20; I

Switchable

Switch

Sectional aluminium; Anodised; Aluminium

coloured anodised

Acrylic (PMMA); White opal

Connector; 5 pin

mounted version

Wall bracket

25 °C

L80B50 50.000h

4013330146221

ca. 6,9 kg; 8,9 kg

ca. 133 mm; 400 mm; 1.185 mm

General light, indirect, 3000K, Ra≥80; Night light, indirect, 2700K, Ra≥80; Reading light, direct, 2700K, Ra≥90; Examination light, direct, direkt, 4000K, 60W, Ra≥95, R9≥50; Switch left; DIN EN 60598-2-25

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear