


# Wall-mounted luminaire ZERA.bed ZEW 9000/VTL/D

114492000-00812998


# Waldmann **W**

ENGINEERS OF LIGHT

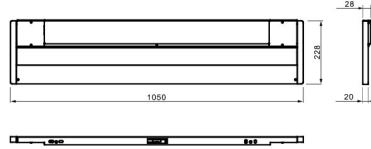

5 pin

D43 | 30.8% ↑ 69.2%      Φ: 7800 lm



**Work equipment**

**Connected load**

**Power consumption**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Chromaticity tolerance LED**

**Glare control**

**System of protection/Class**

**Technology**

**Housing**

**Light source cover**

**Mains lead**

**Design**

**Fastening**

**Maximum ambient temperature**

**Life expectancy LED**

**EAN**

**Weight without/incl. packaging**

**Packaging dimensions**

**Special features**

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 95 W

approx. 8.890 lm

approx. 93 lm/W

adjustable white

approx. 3.000 - 6.500 K

CRI ≥ 80

Direct/indirect

< 3 SDCM

Diffusor

IP 20; I

Switchable

Sectional aluminium; Anodised; Aluminium coloured anodised  
Acrylic (PMMA); White opal

Connector; 5 pin

mounted version

Wall bracket

25 °C

L80B50 50.000h

4013330146245

ca. 6,9 kg; 8,9 kg

ca. 133 mm; 400 mm; 1.185 mm

General light, indirect, 3000K-6500K, Ra≥80;  
Reading light, direct, 2700K, Ra≥90; Examination  
light; direct; 4000K; 36W; Ra≥95; R9≥50; DIN EN  
60598-2-25; External control device required for  
DALI Device Type 6; Biodynamic light VTL

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear