


Wall-mounted luminaire ZERA.bed ZEW 9000/830

114493000-00812995

Waldmann **W**


ENGINEERS OF LIGHT

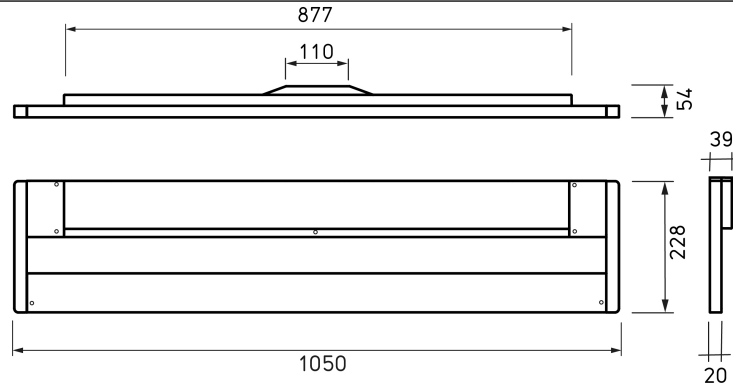

CE UK

5 pin

D43 ↓31.5% ↑68.5% Φ: 7600 lm



| | |
|--|--|
| Work equipment | Power supply unit |
| Connected load | 220 - 240 V; AC; 50 Hz; 60 Hz |
| Power consumption | ca. 89 W |
| Luminous flux | approx. 8.960 lm |
| Luminous efficiency ¹⁾ | approx. 100 lm/W |
| Light type/-color | Warm white |
| Colour temperatur | approx. 3.000 K |
| Color rendering index | CRI ≥ 80 |
| Light distribution | Direct/indirect |
| Chromaticity tolerance LED | < 3 SDCM |
| Glare control | Diffusor |
| System of protection | IP 20 |
| Class of protection | I |
| Technology | Switchable |
| Operation | Switch |
| Emergency lighting | none |
| Housing | Sectional aluminium; Anodised; Aluminium coloured anodised |
| Light source cover | Acrylic (PMMA); White opal |
| Mains lead | Connector; 5 pin |
| Design | mounted version |
| Fastening | Wall bracket |
| Maximum ambient temperature | 25 °C |
| Life expectancy LED | L80B50 50.000h |
| EAN | 4013330146276 |
| Weight (net) | ca. 6,9 kg |
| Dimensions | 1.049,5 mm; 228 mm; 54 mm |
| Special features | General light, indirect, 3000K, Ra≥80; Night light; indirect; 2700K; Ra≥80; Reading light, direct, 2700K, Ra≥90; Examination light; direct; 4000K; 36W; Ra≥95; R9≥50; Protective low voltage relay (LVC); Switch left; DIN EN 60598-2-25 |

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear