


# Wall-mounted luminaire ZERA ZEW 11000/830

114499000-00813011

# Waldmann **W**


ENGINEERS OF LIGHT

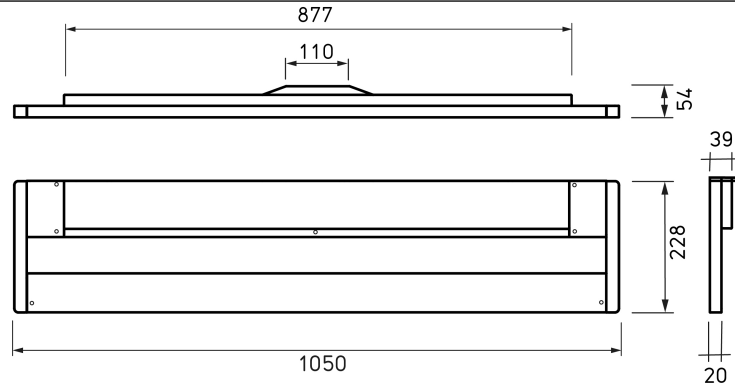

CE UK

5 pin

C43 ↓46.9% ↑53.1% Φ: 9800 lm



<b>Work equipment</b>	Power supply unit
<b>Connected load</b>	220 - 240 V; AC; 50 Hz; 60 Hz
<b>Power consumption</b>	ca. 122 W
<b>Luminous flux</b>	approx. 10.890 lm
<b>Luminous efficiency</b>	approx. 89 lm/W
<b>Light type/-color</b>	Warm white
<b>Colour temperatur</b>	approx. 3.000 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Direct/indirect
<b>Chromaticity tolerance LED</b>	< 3 SDCM
<b>Glare control</b>	See luminaire type
<b>System of protection</b>	IP 20
<b>Class of protection</b>	I
<b>Technology</b>	Switchable
<b>Operation</b>	Switch
<b>Housing</b>	Sectional aluminium; Anodised; Aluminium coloured anodised
<b>Light source cover</b>	Acrylic (PMMA); White opal
<b>Weight (net)</b>	ca. 6,9 kg
<b>Mains lead</b>	Connector; 5 pin
<b>Design</b>	mounted version
<b>Fastening</b>	Wall bracket
<b>Maximum ambient temperature</b>	25 °C
<b>Special features</b>	General light; indirect; 3000K; Ra≥80; Night light; indirect; 3000K; Ra≥90; Reading light; direct; 2700K; Ra≥90; Examination light; direct; direkt; 4000K; 60W; Ra≥95; R9≥50; Protective low voltage relay (LVC); Switch right