


CEE 7/VII

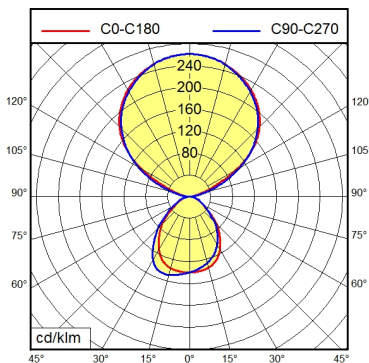

Light source	LED
Work equipment	Electronic ballast
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 45 W
Power factor	env. 0,865
Luminous flux	approx. 5.950 lm
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect; Steel tube; Painted; Tubular section upright; White approx. 29 %
Direct ratio	< 3 SDCM
Chromaticity tolerance LED	Prism aperture
Glare control	≤ 3.000 cd/m ²
Luminance (L65)	≤ 16
Unified glare rating (4H 8H) ¹⁾	IP 20
System of protection	I
Class of protection	Presence and daylight sensor control (PIR); DALI
Technology	Multi-function switch
Operation	none
Emergency lighting	Steel/plastic; Painted; White
Housing	Acrylic (PMMA); Satine
Light source cover	ca. 3,7 m; Mains plug; CEE 7/VII
Mains lead	Socket; Table adaptor
Fastening	25 °C
Minimum ambient temperature	25 °C
Maximum ambient temperature	Flint grey
Decorative contrast side parts	L80B50 60.000h
Life expectancy LED	4013330020385
EAN	ca. 9,5 kg
Weight (net)	1.311 mm
Dimensions	Integrated light and presence sensor PIR; Separated, direct and indirect light individually adjustable; Retrofittable with TALK module; Flicker-free; Inclination of tubular section adjustable; Cradle to Cradle Certified TM; Direct light component with edge light and light-guide technology for homogenous light exit; Luminaire head detachable
Special features	

¹⁾ according to DIN EN 12464-1:2021