Desk-mounted luminaire LAVIGO DPT 9000/840/R/G2

121829000-00804493

Waldmann
LIGHT FOR BETTER RESULTS



CEE 7/VII

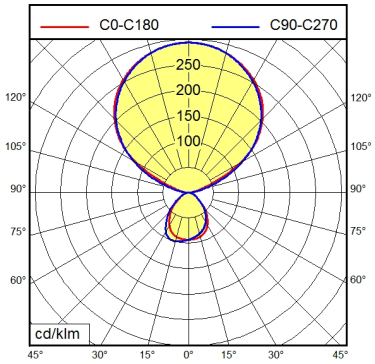

Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Work equipment	Electronic ballast
Power consumption	approx. 63 W
Standby	approx. 0,5 W
Luminous flux	approx. 8.950 lm
Luminous efficiency [1)]	approx. 142 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect; approx. 20 %
Glare control	Prism aperture
Light source	LED
Life expectancy LED	L80B50 60.000h
Chromaticity tolerance LED	< 3 SDCM
Energy efficiency class	C; D
At-risk group	RG0/1
Luminance (L65)	≤ 3.000 cd/m²
UGR class (4H 8H; EN 12464-1)	≤ 16
System of protection/Class	IP 20; I
Technology	Presence and daylight sensor control (PIR)
Operation	Multi-function switch
Housing	Steel/plastic; Painted; Silver metallic
Light source cover	Acrylic (PMMA); Satine
Arm	Steel tube; Painted; Tubular section upright; Silver metallic
Mains lead	approx. 3,7 m; Mains plug; CEE 7/VII
Fastening	Socket; Table adaptor
Ambient temperature min./max	25 °C; 25 °C
Decorative contrast side parts	Flint grey
Weight without/incl. packaging	9,5; approx. 11,9 kg
Packaging dimensions	0 mm; approx. 0 mm; 0 mm
EAN	4013330020521
Power factor	env. 0,91
Special features	Integrated light and presence sensor PIR; Separated, direct and indirect light individually adjustable; Retrofittable with TALK module; Flicker-free; Inclination of tubular section adjustable; Cradle to Cradle Certified TM; Direct light component with edge light and light-guide technology for homogenous light exit; Luminaire head detachable

[1)] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

© 02/11/2026 H.Waldmann GmbH & Co. KG