Free-standing luminaire LAVIGO DPS 28000/VTL/R/G2

121847000-00810632

Waldmann
LIGHT FOR BETTER RESULTS



20 YEARS warranty

CE

VTL

CEE 7/VII

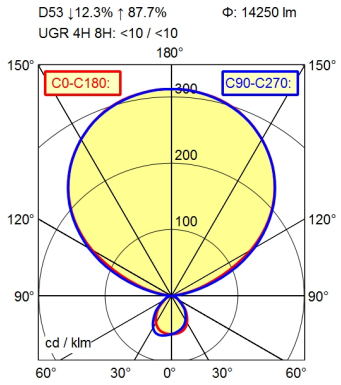

Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Work equipment	Electronic ballast
Power consumption	approx. 200 W
Standby	approx. 0,5 W
Luminous flux	approx. 28.500 lm
Luminous efficiency [1]	approx. 142 lm/W
Light type/-color	direct static white; indirectly dynamic white
Colour temperatur	approx. 3.000 - 6.500 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect; approx. 12 %
Glare control	Prism aperture
Light source	LED
Life expectancy LED	L80B50 60.000h
Energy efficiency class	C; D
At-risk group	RG0/1
Luminance (L65)	≤ 3.000 cd/m²
UGR class (4H 8H; EN 12464-1)	≤ 16
System of protection/Class	IP 20; I
Technology	Presence and daylight sensor control (PIR)
Operation	Multi-function switch; Touch-LED
Housing	Steel/plastic; Painted; White
Light source cover	Acrylic (PMMA); Satine
Arm	Steel tube; Painted; Tubular section upright; White
Luminaire base	C-shaped; White
Mains lead	approx. 3 m; Mains plug; CEE 7/VII
Fastening	Floor standing base
Decorative contrast side parts	Flint grey
Weight without/incl. packaging	27,6; approx. 0 kg
Packaging dimensions	0 mm; approx. 0 mm; 0 mm
Power factor	env. 0,966
EAN	4013330138660
Special features	Integrated light and presence sensor PIR; Separated, direct and indirect light individually adjustable; Retrofittable with TALK module; Flicker-free; Direct light component with edge light and light-guide technology for homogenous light exit; Integrated light management for biodynamic light VTL; Luminaire head detachable

[1] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

© 02/11/2026 H.Waldmann GmbH & Co. KG