


CE



CEE 7/VII

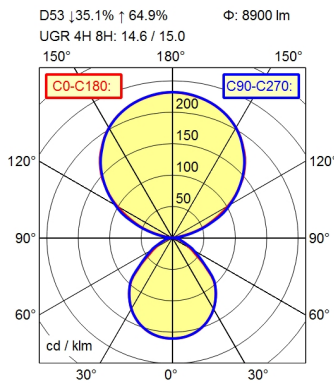

<b>Light source</b>	LED
<b>Work equipment</b>	Electronic ballast DALI
<b>Connected load</b>	220 - 240 V; AC; 50 Hz; 60 Hz
<b>Power consumption</b>	ca. 62 W
<b>Standby</b>	ca. 0,3 W
<b>Power factor</b>	env. 0,959
<b>Luminous flux</b>	approx. 8.900 lm
<b>Luminous efficiency <sup>1)</sup></b>	approx. 143 lm/W
<b>Light type/-color</b>	Cold white
<b>Colour temperatur</b>	approx. 4.000 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Direct/indirect; approx. 35 %
<b>Chromaticity tolerance LED</b>	< 3 SDCM
<b>Glare control</b>	Prism aperture
<b>Luminance (L65)</b>	≤ 4.400 cd/m <sup>2</sup>
<b>UGR class (4H 8H; EN 12464-1)</b>	≤ 16
<b>System of protection/Class</b>	IP 20; I
<b>Technology</b>	Presence and daylight sensor control (PIR)
<b>Operation</b>	Rocker switch
<b>Housing</b>	Steel/plastic; Painted; Silver metallic
<b>Light source cover</b>	Polycarbonate (PC); Clear
<b>Arm</b>	Steel tube; Painted; Tubular section upright; Silver metallic
<b>Mains lead</b>	ca. 3,7 m; Mains plug; CEE 7/VII
<b>Fastening</b>	Socket; Table adaptor
<b>Maximum ambient temperature</b>	25 °C
<b>Decorative contrast side parts</b>	Metallic silver
<b>Life expectancy LED</b>	L80B50 50.000h
<b>Energy efficiency class</b>	C
<b>EPREL number of lightsources</b>	887117
<b>EAN</b>	4013330143237
<b>Weight without/incl. packaging</b>	ca. 8,3 kg
<b>Special features</b>	Integrated light and presence sensor PIR; Flicker-free; Motion sensor time-out of 15mins~; Luminaire head detachable; Direct and indirect light switchable together

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear