


# Free-standing luminaire VIVAA FREE VFS 7000/940/D

121860000-00812669

# Waldmann **W**


LIGHT FOR BETTER RESULTS

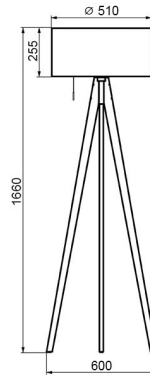

CE



CEE 7/VII

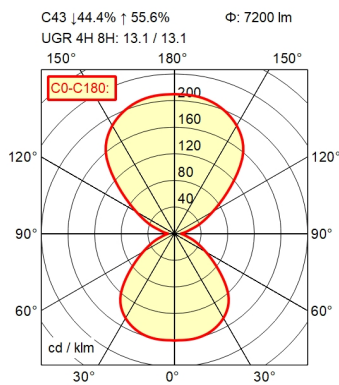

**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**UGR class (4H 8H; EN 12464-1)**

**System of protection/Class**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Arm**

**Mains lead**

**Fastening**

**EAN**

**Weight without/incl. packaging**

**Packaging dimensions**

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

approx. 79 W

approx. 7.200 lm

approx. 91 lm/W

Cold white

approx. 4.000 K

CRI  $\geq$  90; R9  $\geq$  50

Direct/indirect; approx. 44 %

< 3 SDCM

Diffusor

$\leq$  1.600 cd/m<sup>2</sup>

$\leq$  16

IP 20; I

Continuously dimmable; DALI

Pull cord

Polyethylene(PE); Untreated; Anthracite

Polycarbonate (PC); Satine

Wood; Stained; Tubular section upright; Ash dark

approx. 3,4 m; Mains plug; CEE 7/VII

Floor standing base

4013330147570

approx. 6,4

approx. 0 mm; 0 mm; 0 mm

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g