Free-standing luminaire VIVAA FREE VFS 7000/VTL/D

121861000-00818529

Waldmann
LIGHT FOR BETTER RESULTS

20 YEARS warranty

CE

VTL

CEE 7/VII

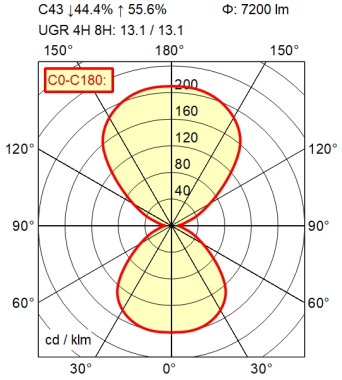

Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Work equipment	Electronic ballast
Power consumption	approx. 79 W
Luminous flux	approx. 7.200 lm
Luminous efficiency [1)]	approx. 91 lm/W
Light type/-color	dynamic white; Warm white
Colour temperatur	approx. 2.700 - 6.500 K
Color rendering index	CRI ≥ 90; R9 ≥ 50
Light distribution	Direct/indirect; approx. 44 %
Glare control	Diffusor
Light source	LED
Energy efficiency class	C
Chromaticity tolerance LED	< 3 SDCM
At-risk group	RG0/1
Luminance (L65)	≤ 1.600 cd/m²
UGR class (4H 8H; EN 12464-1)	≤ 16
System of protection/Class	IP 20; I
Technology	Continuously dimmable; DALI
Operation	Pull cord
Housing	Polyethylene(PE); Untreated; Walnut dark
Light source cover	Polycarbonate (PC); Satine
Arm	Wood; Stained; Tubular section upright; Ash dark
Mains lead	approx. 3,4 m; Mains plug; CEE 7/VII
Fastening	Floor standing base
Weight without/incl. packaging	7,63; approx. 0 kg
Packaging dimensions	0 mm; approx. 0 mm; 0 mm
EAN	4013330204679
Special features	App control; Biodynamic light VTL

[1)] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

www.waldmann.com
© 02/11/2026 H.Waldmann GmbH & Co. KG