Desk-mounted luminaire LAVIGO.single LTX DPT 15000/940/RX/WS/CEE/SE//G3

121872000-00816553

Waldmann
LIGHT FOR BETTER RESULTS



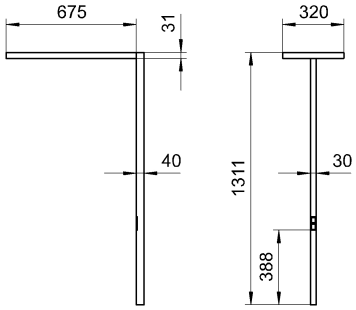

CEE 7/VII

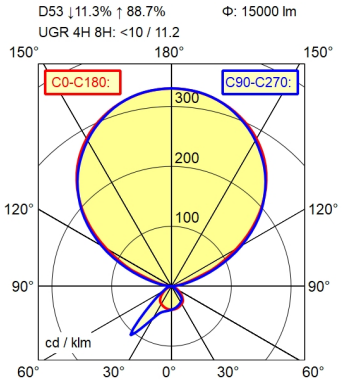

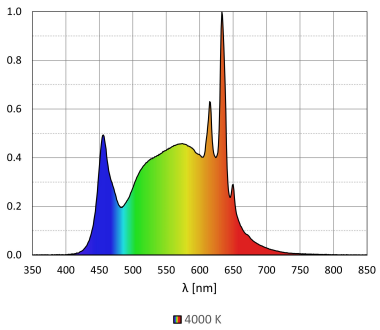

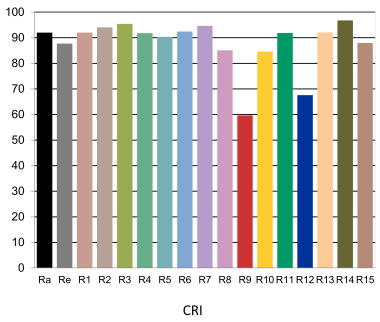

Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Work equipment	Electronic ballast
Power consumption	approx. 90 W
Luminous flux	approx. 15.000 lm
Luminous efficiency [1)]	approx. 166 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 90; R9 ≥ 50
Light distribution	Direct/indirect
Glare control	Prism aperture
Life expectancy LED	L80B50 100.000h
Energy efficiency class	B; C
Chromaticity tolerance LED	< 3 SDCM
Luminance (L65)	≤ 3.000 cd/m²
UGR class (4H 8H; EN 12464-1)	≤ 16
System of protection/Class	IP 20; I
Technology	Multiple daylight-dependent motion sensors
Operation	Multi-function switch
Housing	Steel/plastic; Powder coatet; White
Light source cover	Acrylic (PMMA); Structured
Arm	Steel tube; Powder-coated; Tubular section upright; White
Mains lead	approx. 3,7 m; Mains plug; CEE 7/VII
Fastening	Socket; Table adaptor
Ambient temperature min./max	25 °C; 25 °C
Decorative contrast side parts	Jet black
Weight without/incl. packaging	8,2; approx. 0 kg
Packaging dimensions	0 mm; approx. 0 mm; 0 mm
EAN	4013330191337
Special features	Swarm control; Asymmetric radiation; Separated, direct and indirect light individually adjustable; Flicker-free; Cradle to Cradle Certified TM; Direct light component with edge light and light-guide technology for homogenous light exit; App control; Optional LTX Cloud connection; LTX multisensor for workplace optimisation; TALK Bluetooth; TALK EnOcean

[1)] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

© 12/10/2026 H.Waldmann GmbH & Co. KG