Free-standing luminaire VIVAA.social VSS 7000/VTL/D

121874000-00816382

Waldmann
LIGHT FOR BETTER RESULTS

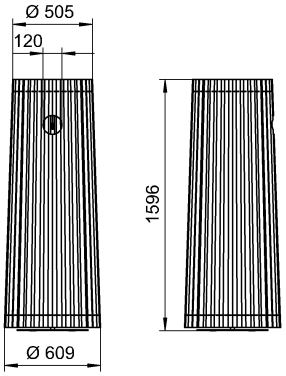

20 YEARS warranty CE VTL

CEE 7/VII

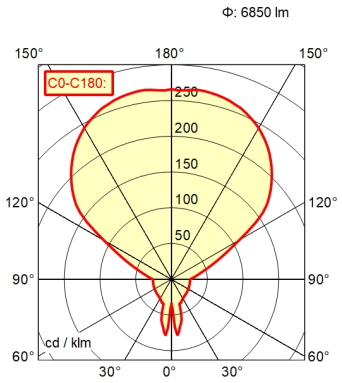

Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Work equipment	Electronic ballast
Power consumption	approx. 79 W
Luminous flux	approx. 6.850 lm
Luminous efficiency [1)]	approx. 86 lm/W
Light type/-color	dynamic white; Warm white; Daylight
Colour temperatur	approx. 2.700 - 6.500 K
Color rendering index	CRI ≥ 90
Light distribution	Direct/indirect; approx. 19 %
Glare control	Diffusor
Energy efficiency class	C
Chromaticity tolerance LED	< 3 SDCM
At-risk group	RG0/1
System of protection/Class	IP 20; I
Technology	Continuously dimmable; DALI
Operation	Pull cord
Housing	Glass fiber/cellulose; Untreated; Nature
Light source cover	Polycarbonate (PC); Satine
Arm	Steel tube; Painted; Tubular section upright; Pure white
Luminaire base	round; Pure white
Mains lead	approx. 2,2 m; Mains plug; CEE 7/VII
Fastening	Floor standing base
Weight without/incl. packaging	0; approx. 13 kg
Packaging dimensions	0 mm; approx. 0 mm; 0 mm
EAN	4013330190941

[1)] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

www.waldmann.com
© 16/11/2026 H.Waldmann GmbH & Co. KG