


light source
work equipment
connected load
Power consumption
lens
luminous flux
luminous efficacy
Beam Angle
colour temperature
color rendering index (CRI)
chromaticity tolerance LED
glare control
System of protection
class of protection
technology
luminaire body
lamp cover
weight (net)
Fastening
life expectancy LED
Permissible ambient temperature
LED

Energy efficiency category A/A+/A++

adjustable electronic ballast; digital DALI

220-240 V; 50-60 Hz

approx. 28 W

W optics; wide beam

approx. 4600 lm

approx. 164 lm/W

95° / 100°

neutral white, approx. 5000 K

>= 80

3 SDCM

Prism optics (linear)

IP54

I

DALI, continuously dimmable

aluminium, powder-coated, white

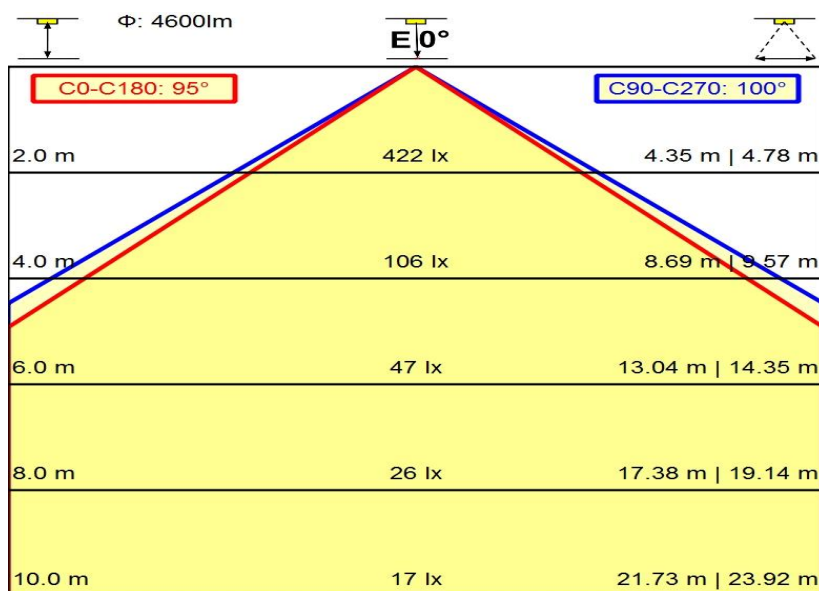
Acrylic satine

approx. 1.9 kg

(separately available)

L80B50 = 50.000

-25 - +55 °C


luminous intensity
