



Free-standing luminaire YARA.single YAS 14000/840/R/WS/CEE/00/C

114268000-00808086

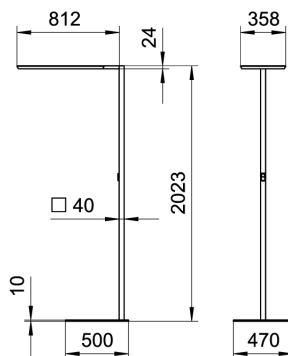

D43 ↓ 13.0% ↑ 87.0%



Light source	LED
Work equipment	Electronic ballast DALI
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	approx. 99 W; 107 W
Standby	approx. 0,5 W
Power factor	env. 0,966
Luminous flux	approx. 14.000 lm
Luminous efficiency ¹⁾	approx. 141 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect; approx. 13 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 2.600 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 16
System of protection/Class	IP 20; I
Technology	Presence and daylight sensor control (PIR)
Operation	Wireless switch
Housing	Aluminium/plastic; Powder coatet; White
Light source cover	Acrylic (PMMA); Structured; Satine
Arm	Steel tube; Powder-coated; Tubular section upright; White
Luminaire base	C-shaped; White
Mains lead	approx. 3 m; Mains plug; CEE 7/VII
Fastening	Floor standing base
Life expectancy LED	L80B50 60.000h
Energy efficiency class	D; D
EPREL number of lightsources	1974823; 1974843; 1974875
EAN	4013330056193
Weight without/incl. packaging	18; approx. 22,3 kg
Packaging dimensions	approx. 0 mm; 0 mm; 0 mm
Special features	Asymmetric radiation; Flicker-free; App control; Direct and indirect lighting component with edge light and light guide technology for a homogeneous light exit; PIR movement and daylight sensor; Magnetic control panel, freely positionable

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear