


Free-standing luminaire VIVAA FREE VFS 7000/940/D

121860000-00812671

Waldmann **W**


ENGINEERS OF LIGHT

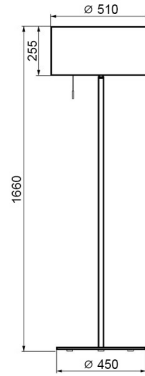

CE



CEE 7/VII

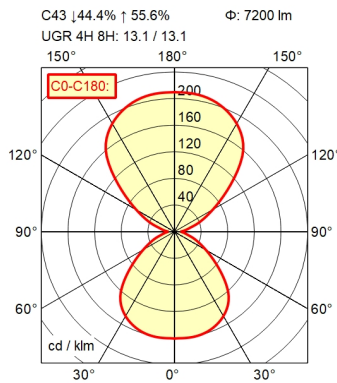

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Luminaire base

Mains lead

Fastening

EAN

Weight without/incl. packaging

Packaging dimensions

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

approx. 79 W

approx. 7.200 lm

approx. 91 lm/W

Cold white

approx. 4.000 K

CRI \geq 90; R9 \geq 50

Direct/indirect; approx. 44 %

< 3 SDCM

Diffusor

\leq 1.600 cd/m²

\leq 16

IP 20; I

Continuously dimmable; DALI

Pull cord

Polyethylene(PE); Untreated; Anthracite

Polycarbonate (PC); Satine

Steel tube; Painted; Tubular section upright;

Anthracite grey

round; Anthracite grey

approx. 2,2 m; Mains plug; CEE 7/VII

Floor standing base

4013330147600

approx. 12,3

approx. 0 mm; 0 mm; 0 mm

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g