


CEE 7/VII

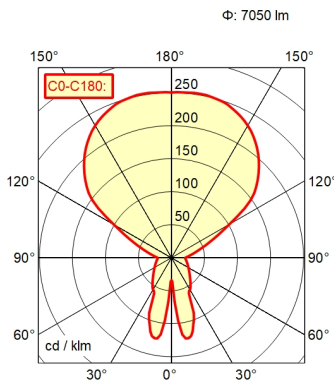

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Luminaire base

Mains lead

Fastening

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

approx. 79 W

approx. 7.050 lm

approx. 89 lm/W

dynamic white; Warm white; Daylight

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 24 %

< 3 SDCM

Diffusor

IP 20; I

Continuously dimmable; DALI

Pull cord

Glass fiber/cellulose; Untreated; Grey

Polycarbonate (PC); Satine

Steel tube; Painted; Tubular section upright; Pure white

round; Pure white

approx. 2,2 m; Mains plug; CEE 7/VII

Floor standing base

C

4013330190958

approx. 0

approx. 0 mm; 0 mm; 0 mm

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear